


## V H -190 0 L O P\_4

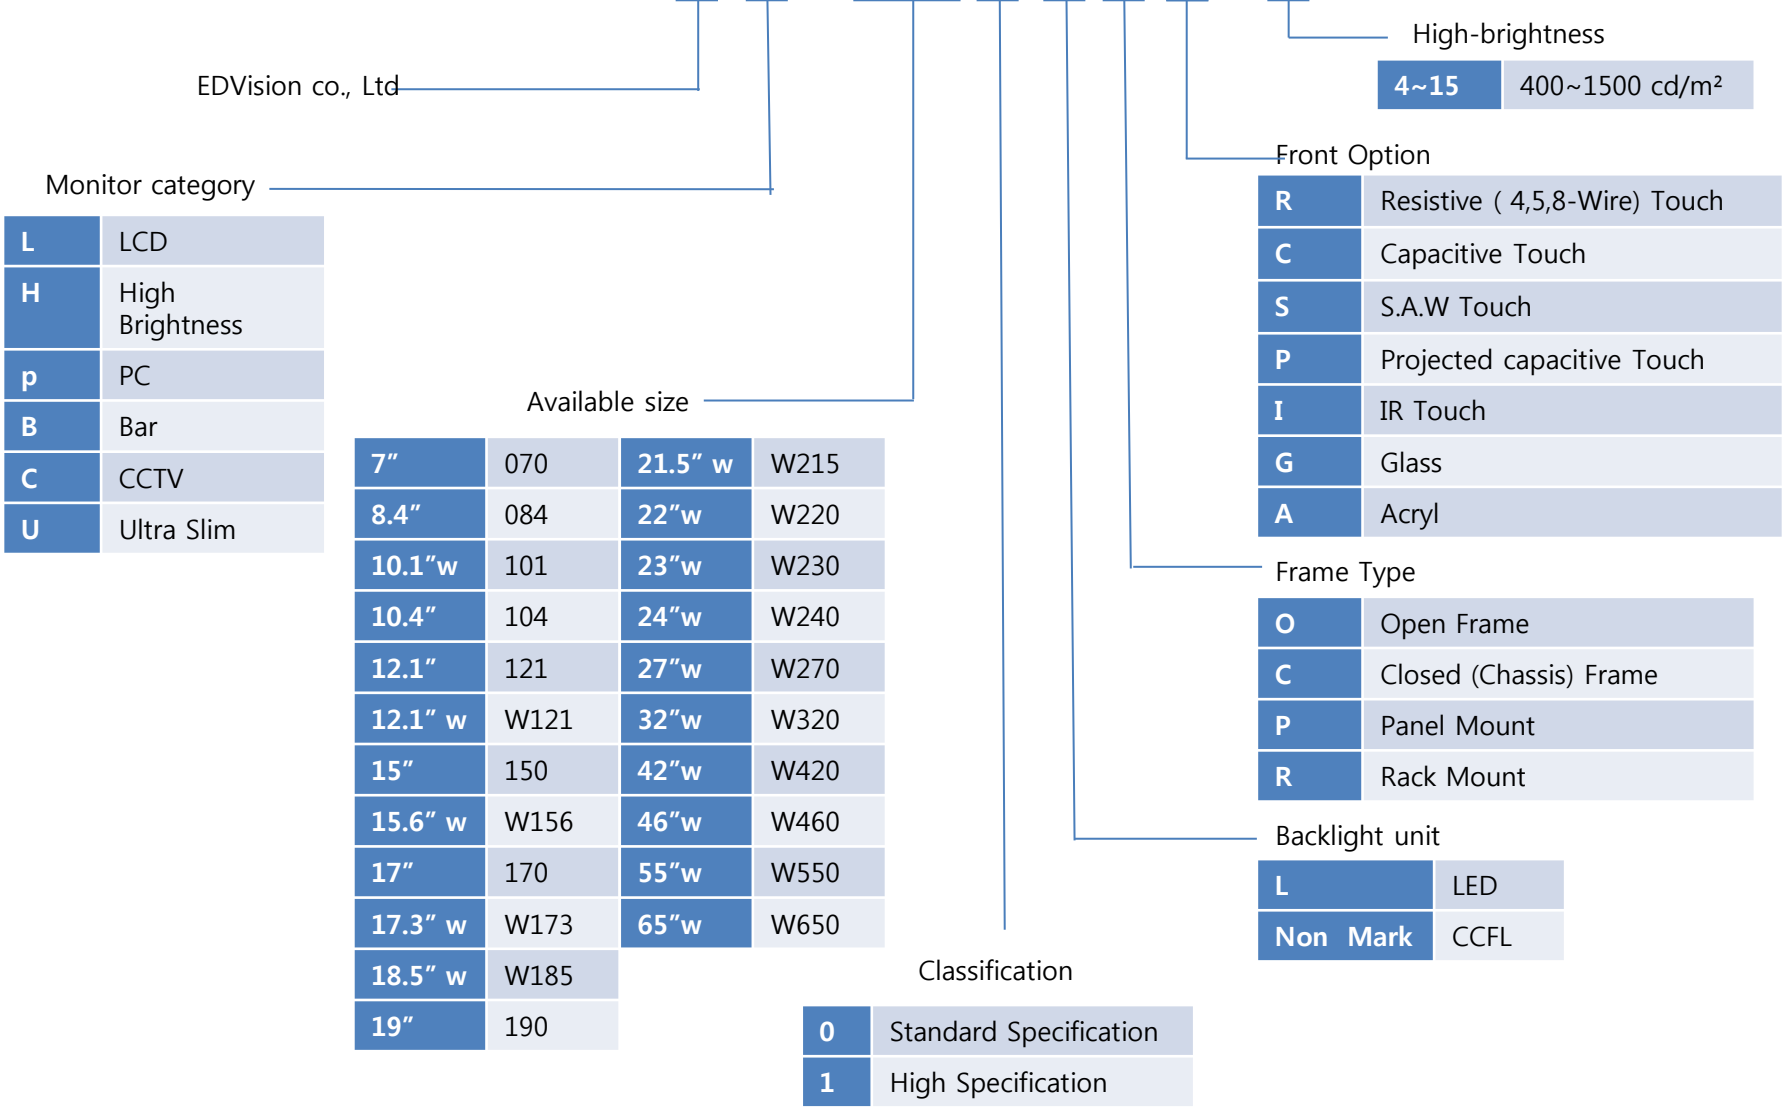

EDVision co., Ltd

Monitor category

|   |                 |
|---|-----------------|
| L | LCD             |
| H | High Brightness |
| p | PC              |
| B | Bar             |
| C | CCTV            |
| U | Ultra Slim      |

Available size

|         |      |         |      |
|---------|------|---------|------|
| 7"      | 070  | 21.5" w | W215 |
| 8.4"    | 084  | 22"w    | W220 |
| 10.1"w  | 101  | 23"w    | W230 |
| 10.4"   | 104  | 24"w    | W240 |
| 12.1"   | 121  | 27"w    | W270 |
| 12.1" w | W121 | 32"w    | W320 |
| 15"     | 150  | 42"w    | W420 |
| 15.6" w | W156 | 46"w    | W460 |
| 17"     | 170  | 55"w    | W550 |
| 17.3" w | W173 | 65"w    | W650 |
| 18.5" w | W185 |         |      |
| 19"     | 190  |         |      |

Classification

|   |                        |
|---|------------------------|
| 0 | Standard Specification |
| 1 | High Specification     |

High-brightness

|      |                            |
|------|----------------------------|
| 4~15 | 400~1500 cd/m <sup>2</sup> |
|------|----------------------------|

Front Option

|   |                               |
|---|-------------------------------|
| R | Resistive ( 4,5,8-Wire) Touch |
| C | Capacitive Touch              |
| S | S.A.W Touch                   |
| P | Projected capacitive Touch    |
| I | IR Touch                      |
| G | Glass                         |
| A | Acryl                         |

Frame Type

|   |                        |
|---|------------------------|
| O | Open Frame             |
| C | Closed (Chassis) Frame |
| P | Panel Mount            |
| R | Rack Mount             |

Backlight unit

|          |      |
|----------|------|
| L        | LED  |
| Non Mark | CCFL |